

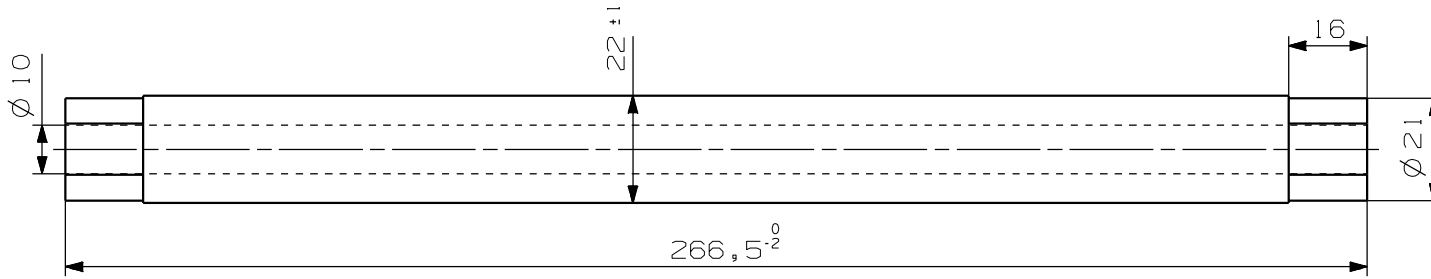


(ALL DIMENSION ARE IN MM)

5L28010 DRG. NO.

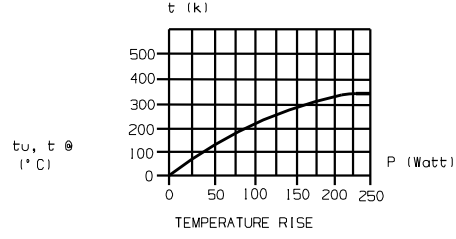

PART NO.	RESISTANCE VALUE K
5582256	12
5580861	22
5582439	27
5581897	33
5580245	39
5580246	47
5581408	56
5581922	82
5581923	100
5582976	120
5581639	150
5581924	220



CHARACTERISTICS:-
 TEMPERATURE COEFFICIENT +100...+180-10⁻⁶/k
 LIMITING VOLTAGE 4000 VOLTS APPROX.
 WATTAGE AT 40° C AMBIENT TEMP. 250 WATTS
 RESISTANCE RANGE 12 KΩ... 220 KΩ
 STANDARD acc. TO DIN 41426 E12: ±10%
 VITRIFIED SURFACE 154 cm²

REMARKS	ITEM NO.	DESCRIPTION	STD	VITRIFIED WIRE WOUND RESISTOR	A/C	UNIT	0.250
				SG12015			001
				MATL CODE			UNIT WT.
				MATL SPECN			QTY.

	Δ R/R
SHELF LIFE 5000 h AT 25° C	≤ 0.1%
LOAD LIFE 5000 h	≤ 3%
DAMP HEAT 40° C 95% 112d	≤ 0.2%

ADDITIONAL INFORMATION

STATUS OF DRAWING

DISTRIBUTION OF PRINTS

SWE	SWM	TCX
1	3	1

TYPE OF PRODUCT OR NAME OF CUSTOMER/PROJECT
ON LOAD TAP CHANGER



BHARAT HEAVY ELECTRICALS LTD. DRN. BHOPAL	NAME	SIGN.	DATE	NO. OF VAR
	AKU	SD/-	23.11.86	
	YUP	SD/-	07.12.86	
	APPD	RKS	SD/-	17.12.86

REV.	DATE	ALTERED	REV.	DATE	ALTERED
07	26.04.13	CHECKED V D			
		CHECKED KS			
		APPD SKP			

DPT. SWE	UNTOL. DMS. GR.	SCALE	WEIGHT (K.G.)	REF. TO ASSY. DRG.	ITEM NO.	NO. OF ITEM
409	AA0230208	1:1				001
TITLE			SIZE	CAGE CODE	DRG NO.	REV.
TIE-IN-RESISTOR WITH CAP			A3		5L28010	07
			SCALE	SHT NO. 01	SHEETNO. OF SHT 01	

INVENTORY NO., SIGN AND DATE, REF. DRG. NO., 5L28010-R04-501, THE INFORMATION ON THIS DOCUMENT IS THE PROPERTY OF BHARAT HEAVY ELECTRICALS LIMITED IT MUST NOT BE USED DIRECTLY OR INDIRECTLY IN ANY WAY DETERIMENTAL TO THE INTEREST OF THE COMPANY

A, B, C, D

A, B, C, D

6 5 4 3 2 1