

FORM NO. ORE/015



PRODUCT STANDARD
OIL RIG ENGINEERING DIVISION

OR 12106
PAGE₁ OF₁

SPECIFICATIONS FOR 50A, 1500V AC HRC FUSE

Description : 50A, 1500V AC fast acting HRC fuse. The fuse shall have a trip indicator. It shall have rupturing capacity of 50 KA at 1500V AC, 50 Hz.

Application : It shall be used for protection of power semiconductors.

Working Voltage : 1.5 KV AC, 50 Hz.

Conformance to Standards: IEC 269 - 1 & 4
BS 88 - 1 & 4
DIN 57636

Characteristics : Time/Current characteristics given below and shall be generally matching to this.

General : 1. Outline dimensions shall be furnished alongwith the offer.
2. Detailed characteristics curves to be furnished alongwith the offer viz time/current, I²t etc.

Dimensions : Diameter = 20 mm.
Length = 127 mm.

COPYRIGHT AND CONFIDENTIAL
 The information on this document is the property of Bharat Heavy Electricals Ltd. It must not be used directly or indirectly in any way detrimental to interest of Co.

Revision: 01

PRINTS TO:-

Approved: *[Signature]*


Date: 09/5/95

etc | 1

Prepared	Issued	Date
<i>[Signature]</i>	<i>[Signature]</i>	09/5/95

ANNEXURE TO SPECIFICATION NO. ORP12106

TIME - CURRENT CHARACTERISTICS FOR
50A, 1500V AC HRC FUSE.

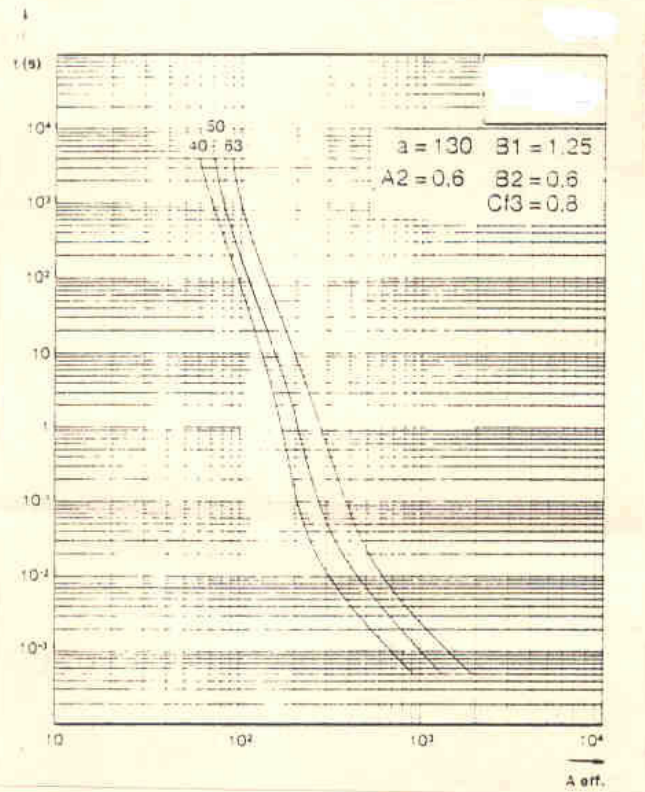

Handwritten signature
09.05.95