



3 HOLES, DRILL & TAP M12 NUT,
EQUALLY SPACED AS SHOWN

UNMACHINED SURFACES ON THIS
SIDE OF BEARING CAP TO BE
SANDBLASTED & THOROUGHLY
CLEANED.

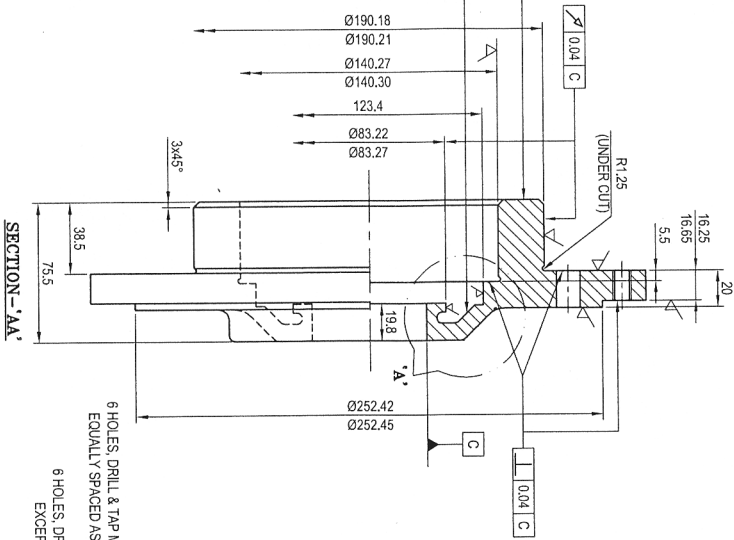

6 HOLES, DRILL & TAP M10 NUT,
EQUALLY SPACED AS SHOWN

6 HOLES, DRILL, 12.8 EQUALLY SPACED
EXCEPT ONE OFF SET AS SHOWN

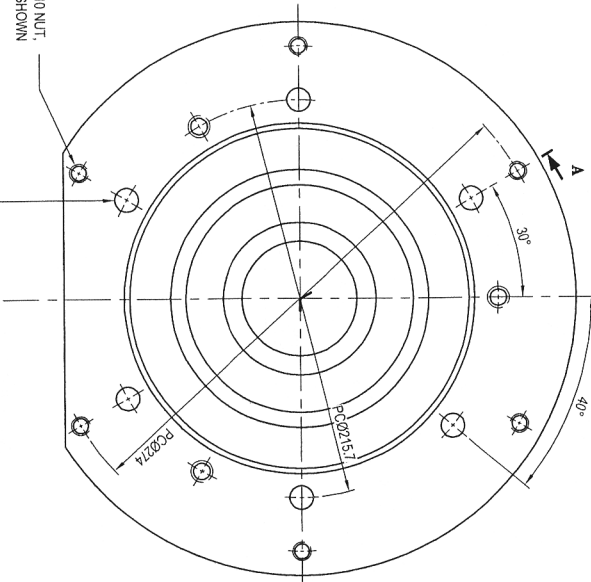

- NOTES :-
1. MACHINE $\frac{1}{2}$ ALL OVER.
 2. TOLERANCE ON ANGLE $\pm 15'$.

TITLE:		SKETCH NO.	
BEARING CAP		TME/SKETCH	
DESCRIPTION	MATL. SPKN.	IS:210-1993 Gr.FG200	9
BEARING CAP CASTING			UN